

# abesco


## FP200 FR Expanding Foam



### product description

Abesco FP200 FR Expanding Foam is a single pack fire rated polyurethane expanding foam, and is designed to prevent the spread of fire and smoke from one compartment to another through construction joints, gaps and voids or openings for service penetrations in fire rated walls and floors, and provides up to 4 hours fire resistance.

Abesco FP200 FR Expanding Foam has excellent adhesion properties to most common building surfaces and when cured provides a strong semi-rigid fire rated seal. Once fully expanded and cured Abesco FP200 FR Expanding Foam is unaffected by moisture and does not degrade in high humidity conditions. Abesco FP200 FR Expanding Foam is an extremely versatile product and as such is well suited for use in a wide range of other applications.

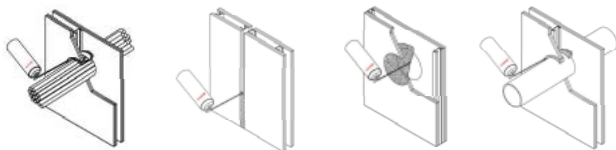

- **Extremely versatile solution**
- **CFC free**
- **Excellent fill capabilities**
- **Very easy to install and finish**
- **Excellent smoke and draft seal capabilities**
- **Sound dampening capabilities**
- **Paintable and stainable**
- **Easily trimmed after curing**
- **Excellent adhesion to most building substrates**
- **Unaffected by moisture or humidity when cured**
- **Cures to provide a strong semi-rigid seal**

### testing and performance data

Tested in accordance with the methodology and criteria described in:

BS 476-20 (up to 4 hours)  
EN 1366-3 (up to 4 hours)  
ASTM E814 / UL 1479 (Classified 1 & 2 hour systems)  
ASTM E-84 (Flame 10, Smoke 35)  
ASTM E-662  
ASTM E-162



FILL VOID OR CAVITY  
MATERIALS FOR USE IN  
THROUGH PENETRATION  
FIRESTOP SYSTEMS SEE UL  
DIRECTORY OF PRODUCTS  
CERTIFIED FOR CANADA AND UL  
FIRE RESISTANCE DIRECTORY



Abesco LLC  
9561 Satellite Blvd.  
Unit 325  
Orlando, FL 32837  
USA

Tel: 888-FIRESTP  
Tel: 407-851-3300  
Fax: 407-851-3388  
Email: [ustechnical@abesco.net](mailto:ustechnical@abesco.net)  
Web: [www.abesco.net](http://www.abesco.net)

E1 Rev 1

As part of our policy of ongoing improvement, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as Abesco has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

## FP200 FR Expanding Foam

### application

Abesco FP200 FR Expanding Foam is suitable for use in most buildings where a seal is required for through penetrations in fire rated floors and walls.

It has excellent adhesion to various surfaces like concrete, brick, wood, metal, aluminum and steel. It has no adhesion to polyethylene, silicone and teflon.

Easy wet cleanup using Acetone, M.E.K., & Lacquer Thinner

### installation methods

1. Ensure surfaces are firm and free of dust, loose particles and grease.
2. As Abesco FR Foam dries by moisture absorption, all surfaces should be moistened well with water before application of the foam.
3. Shake the can thoroughly 15 - 20 times. Attach the adapter to the can, taking care not to over-tighten or activate the valve during this process.
4. The can should be turned upside down with the adapter and valve pointing downwards for application of the foam. The best application temperature is 68 - 77°F (20 - 25°C)
5. The foam should be applied into gaps and openings from the bottom first, working up as each layer is allowed to part cure. Care must be taken not to insert excessive quantities of foam at one time as the rapid expansion will lead to overspill and unwanted post expansion. Foam extrusion can be controlled accurately by varying the pressure or side to side and tilting the adapter. The applied volume of foam will expand 2-3 times its original volume, therefore the foam should be inserted into a maximum 50% of the volume to be filled. Avoid emptying the entire can onto a enclosed location without moving the nozzle to obtain even filling, this will help with even curing and eliminate liquid or un-foamed voids.
6. Moisture is needed to ensure rapid and even curing of the foam and care must be taken to ensure surfaces are kept moist during application (a watering spray for plants is a good tool to use for this purpose). This is especially important for hot or dry climates.
7. After 12 hours, hardened foam can be cut or sawed away with a small saw or knife to leave a neat finish. Painting or staining with acrylic or latex based paints or stains can be done.

### physical properties

Application temperature: minimum 5°C (41°F) (surfaces), 20°C-25°C (68°F-77°F) (Can)

Can must be inverted for dispensing

Flammable during dispensing

Tack free time: 5 - 10 minute, depending on temperature and humidity

Cure time: 20 - 25 minute 38mm (1.5" Dia.), depending on temperature and humidity

Hardening time: 1.5 - 5 hours, depending on temperature and humidity

Foam when cured has around 60% closed cell content

Specific gravity - 22 - 26 kg/m<sup>3</sup>

Water absorption: maximum 1 % volume

Temperature resistance: - 40°C to + 90°C (- 40°F to + 194°F)

Tensile strength: 0,071 - 0,076 MPa

Elongation at break: 15 - 20 %

Free expansion: 120%

Flame and smoke index: 10 & 35, Class A Rating

Flammability class: B1 according to DIN 4102, part 1

Storage: 9 months 10°C to 20°C (+5°F to +68°F)

Higher temperatures can shorten storage life. Must be in vertical position (upright).

VOC: 2% per Council Directive 1999/13/EC or 23.6 g/l

STC: 38

Dielectric Constant (relative static permittivity) 1.2

R: 7/inch (2.54 cm)

### ordering information - worldwide

Item	Case Qty.	Color	Size
20424	12	Pink	24 oz.
20410	12	Pink	10 oz.

Pallet quantity of 24 oz. cans: 816

Pallet quantity of 10 oz. cans 1,500

Product only ships ground



Abesco LLC  
9561 Satellite Blvd.  
Unit 325  
Orlando, FL 32837  
USA

Tel: 888-FIRESTP  
Tel: 407-851-3300  
Fax: 407-851-3388  
Email: [ustechnical@abesco.net](mailto:ustechnical@abesco.net)  
Web: [www.abesco.net](http://www.abesco.net)

E1 Rev 1

As part of our policy of ongoing improvement, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as Abesco has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.